

DOOR OPENER T-LINE

**DC
MOTOR**

Max. wing weight :
1 wing: 150 kg
2 wings: 130+130 kg

Opening
speed
80 cm/s



T-LINE is TAU's automation for pedestrian sliding doors. It is conceived for busy environments, where a fast opening speed is required, as well as for domestic environments, where softer and more controlled movements are needed. Thanks to its simple and elegant design, the silent T-LINE automation can easily match any type of house furniture.

T-LINE automatic sliding door is easy to install and control, thanks to some smart devices such as the self-support beam and its cover.

Every automation system must be completed with opening, safety and control devices according to the existing legislation.



**Accessories for
T-LINE series**
Page 172 - 173


FEATURES:

- commercial use
- emergency operation with integrated backup battery pack (optional)
- max. door panel weight 1 x 150 kg or 2 x 130 kg
- max. clear passage width 3100 mm
- in accordance with EN 16005 standards


PROS:

- intensive use
- ideal for offices, supermarkets, hospitals and busy environments
- obstacle detection and crush prevention
- large vertical (20 mm) and horizontal (36 mm) leaf adjustment range
- assisted cover opening

TYPES OF OPENING



DOUBLE LEAF (view from inside)



SINGLE LEAF
opening to the right (view from inside)



SINGLE LEAF
opening to the left (view from inside)

Technical features	1 LEAF T-LINE	DOUBLE LEAF T-LINE
Door opening width	700 ÷ 3200 mm	900 ÷ 3200 mm
Max. leaf weight	150 kg	130 Kg +130 kg
Max. automation sizes	160 x 120 x max. length 6500 mm	
Power supply	230 V AC (50 – 60 Hz)	
Absorbed power	120 W	
Adjustable opening and closing force	150 N	
DC door operator power supply	48 V DC	
Outer accessories power supply	12 / 24 V DC	
Opening speed	80 cm/s per leaf	
Closing speed	80 cm/s per leaf	
Adjustable opening time	0 ÷ 32 s	
Automatic opening time increase	Yes	
Reduced winter opening	standard 75% off opening width	
Operating temperature	-20°C ÷ +50°C	
Degree of protection	IP 22	
Duty cycle	100%	
Number of manoeuvres	1.000.000 manoeuvres test	
Safety test	Radar test function available as per EN 16005 requirements	
Interlock system	Available. A second TAU automatic door can only be opened after the closing of the first one	
Separate opening/closure inputs	Yes	
Type of use	Residential – Commercial – Industrial	
Control unit	DC20	

COMPONENTS OF T-LINE AUTOMATIC DOOR



SIDE HANDLE UNLOCKING DEVICE (optional)

It is possible to unlock the automation manually thanks to the simple and intuitive side handle placed to the right of the aluminium beam.



COMPACT SIZES

Easy to fit in any environment thanks to its small sizes (only 120 mm height and 157,5 mm width).





SILENT MOVEMENT

A track that lays on an anti-vibration gasket ensures a silent and flowing movement of the door.

The track can be replaced once worn out.

An additional sound control gasket has been placed between the beam and its cover in order to further reduce the impact of the vibrations.

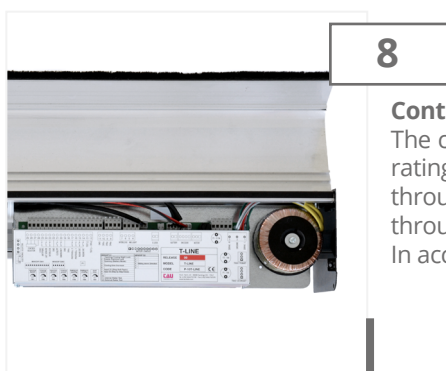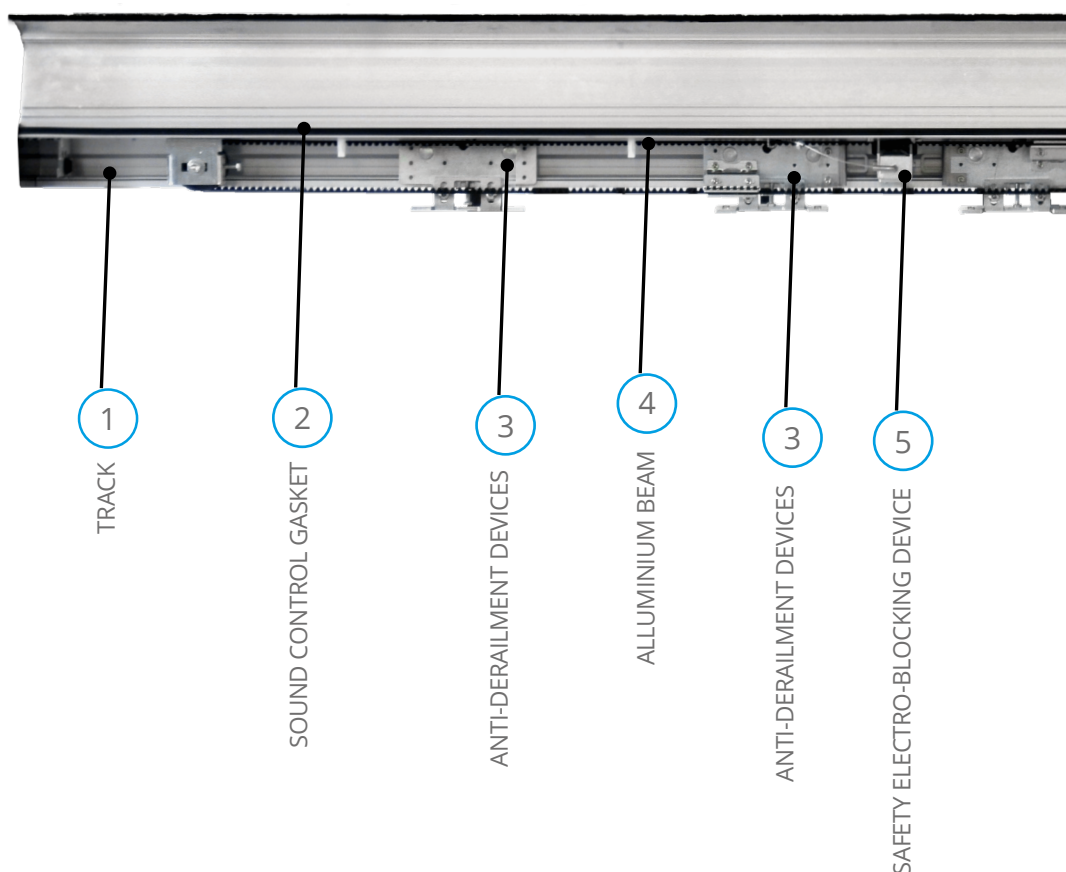

8

Control unit


The control unit is conceived to meet any operating need. Easy to programme, it can be set through simple trimmers and dip switches or through the optional digital keypad.

In accordance to EN-16005 standards.

3

ANTI-DERAILMENT DEVICES


The steady double wheel track rollers with a third anti-derailment wheel are conceived to sustain leaves that weigh up to 150 kg.



EASY AND QUICK INSTALLATION

Thanks to the practical aluminium anchor template, the beam can quickly and easily be fixed just by one person.

4



3

ANTI-DERAILMENT DEVICES

6

ALUMINIUM BEAM COVER

7

MOTOR WITH ENCODER

8

CONTROL UNIT

9

SIDE HANDLE UNLOCKING DEVICE


5

SAFETY ELECTRO-BLOCKING DEVICE

Manual emergency opening device simple and easy to activate thanks to the central or side handle. The optional electro-locking device ensures the closing of the door.

EVERYTHING UNDER CONTROL

A steady DC gate operator with optical encoder ensures and controls the movement of the door.




7

PRACTICAL

The aluminium beam cover can easily be opened. It can also remain lifted up to make the maintenance of the automation easier.

6

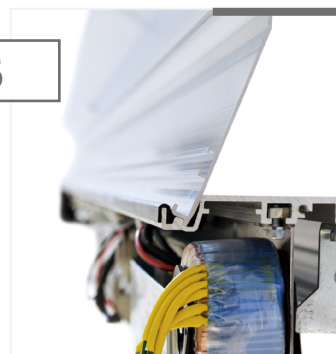

The single or double leaf automation includes: anodized aluminium beam, anodized aluminum cover, side caps, operator, belt, carriage assemblies and electronic control unit. The price of each automation refers to the maximum length of the beam and of the cover, but they can also be cut to the required size.

SINGLE LEAF AUTOMATIC SLIDING DOOR MAX. 150 KG

Reference	Clear opening	Beam cut length*	Max. leaf weight
P-10T-LINE1.195	900 mm	1950 mm	1 x 150 kg
P-10T-LINE1.215	1000 mm	2150 mm	1 x 150 kg
P-10T-LINE1.235	1100 mm	2350 mm	1 x 150 kg
P-10T-LINE1.255	1200 mm	2550 mm	1 x 150 kg
P-10T-LINE1.275	1300 mm	2750 mm	1 x 150 kg
P-10T-LINE1.295	1400 mm	2950 mm	1 x 150 kg
P-10T-LINE1.315	1500 mm	3150 mm	1 x 150 kg
P-10T-LINE1.335	1600 mm	3350 mm	1 x 150 kg
P-10T-LINE1.355	1700 mm	3550 mm	1 x 150 kg
P-10T-LINE1.375	1800 mm	3750 mm	1 x 150 kg
P-10T-LINE1.395	1900 mm	3950 mm	1 x 150 kg
P-10T-LINE1.415	2000 mm	4150 mm	1 x 150 kg
P-10T-LINE1.435	2100 mm	4350 mm	1 x 150 kg
P-10T-LINE1.455	2200 mm	4550 mm	1 x 150 kg
P-10T-LINE1.475	2300 mm	4750 mm	1 x 150 kg
P-10T-LINE1.495	2400 mm	4950 mm	1 x 150 kg
P-10T-LINE1.515	2500 mm	5150 mm	1 x 150 kg
P-10T-LINE1.535	2600 mm	5350 mm	1 x 150 kg
P-10T-LINE1.555	2700 mm	5550 mm	1 x 150 kg
P-10T-LINE1.575	2800 mm	5750 mm	1 x 150 kg
P-10T-LINE1.595	2900 mm	5950 mm	1 x 150 kg
P-10T-LINE1.615	3000 mm	6150 mm	1 x 150 kg
P-10T-LINE1.635	3100 mm	6350 mm	1 x 150 kg

* the measurement of the beam cut includes the 3+3 cm of the side caps

DOUBLE LEAF AUTOMATIC SLIDING DOOR MAX. 130+130 KG

Reference	Clear opening	Beam cut length*	Max. leaf weight
P-10T-LINE2.215	1000 mm	2150 mm	2 x 130 kg
P-10T-LINE2.235	1100 mm	2350 mm	2 x 130 kg
P-10T-LINE2.255	1200 mm	2550 mm	2 x 130 kg
P-10T-LINE2.275	1300 mm	2750 mm	2 x 130 kg
P-10T-LINE2.295	1400 mm	2950 mm	2 x 130 kg
P-10T-LINE2.315	1500 mm	3150 mm	2 x 130 kg
P-10T-LINE2.335	1600 mm	3350 mm	2 x 130 kg
P-10T-LINE2.355	1700 mm	3550 mm	2 x 130 kg
P-10T-LINE2.375	1800 mm	3750 mm	2 x 130 kg
P-10T-LINE2.395	1900 mm	3950 mm	2 x 130 kg
P-10T-LINE2.415	2000 mm	4150 mm	2 x 130 kg
P-10T-LINE2.435	2100 mm	4350 mm	2 x 130 kg
P-10T-LINE2.455	2200 mm	4550 mm	2 x 130 kg
P-10T-LINE2.475	2300 mm	4750 mm	2 x 130 kg
P-10T-LINE2.495	2400 mm	4950 mm	2 x 130 kg
P-10T-LINE2.515	2500 mm	5150 mm	2 x 130 kg
P-10T-LINE2.535	2600 mm	5350 mm	2 x 130 kg
P-10T-LINE2.555	2700 mm	5550 mm	2 x 130 kg
P-10T-LINE2.575	2800 mm	5750 mm	2 x 130 kg
P-10T-LINE2.595	2900 mm	5950 mm	2 x 130 kg
P-10T-LINE2.615	3000 mm	6150 mm	2 x 130 kg
P-10T-LINE2.635	3100 mm	6350 mm	2 x 130 kg

* the measurement of the beam cut includes the 3+3 cm of the side caps

T-LINE INSTALLATION KIT

FEATURES:

The components to assemble the door (beam, cover and so on) are supplied separately. Cutting and assembling operations are carried out by the customer. It is the best solution for customers that need to quickly fulfil orders of tailor-made doors

PROS:

- competitive costs
- increased flexibility
- eliminates the need to stock complete door packages
- logistics optimization
- prompt delivery to the end-user of a customized door package





P-TLINEKIT1.150

Single leaf sliding door opener (max. 150 kg)

P-TLINEKIT2.130

Double leaf sliding door opener (max. 130 + 130 kg)

The beam and its cover can also be supplied in anodized aluminium (natural aluminium colour) upon request just before the order, with a 20% increase on the pricelist.

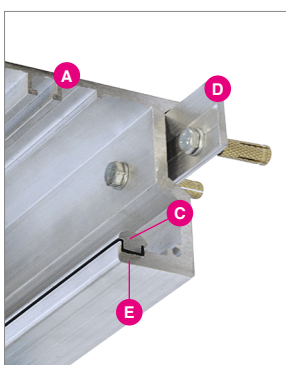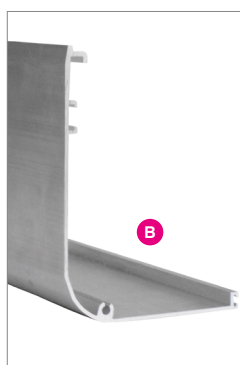

A) S-10T-LINETRA65

T-Line support beam / = 6500 mm

B) S-10T-LINECAR65AN

Front cover profile in anodized aluminum T-Line / = 6500 mm

C) S-10T-LINEROT65

T-Line track / = 6500 mm

D) S-10T-LINEANK65

T-Line anchor template / = 6500 mm

E) S-10T-LINEANR

Anti-vibration gasket for T-Line track. (200 m)

F) M-0300000380


Extruded rubber (200 m)

G) S-T-LINEGUM

38 mm rubber gasket

H) S-10DOORCING

Traction belt (50 m)






FRAME BREAK-OUT SYSTEM FOR SLIDING DOORS

It is the best certified solution when the automatic door is also the only emergency exit. Such system ensures the outward swing opening of the door when pushed.

LEGEND:

 = photocells S-10DOORFOTOH1

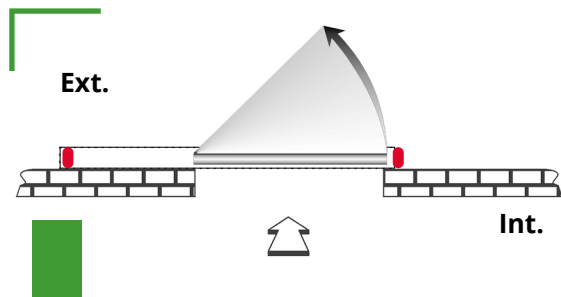


S-10DOORSF1M

Configuration: single sliding with fixed sidelight panels. Frame break-out system composed of 1 x break-out kit, 1 x upper profile 1300 mm, 1 x floor track 1400 mm. Specify right or left-hand (consult TAU for additional information)

Note: The automation is installed on the external wall of the building, so it must be protected from bad weather.

Additional components (to be purchased separately):
S-10DOORFOTOH1 Pair of safety photocells
S-10DOORSTF Pair of containers for additional safety photocells

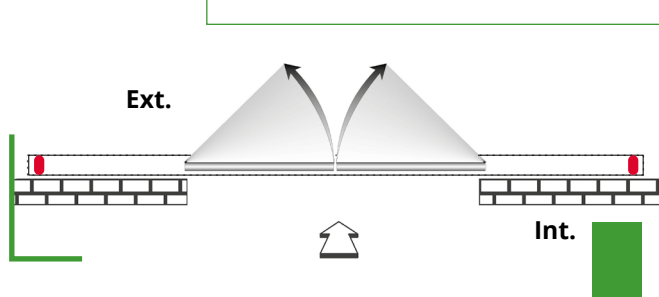


S-10DOORSF2M

Configuration: bi-parting with fixed sidelight panels. Frame break-out system composed of 2 x break-out kits, 2 x upper profiles 1300 mm, 2 x floor tracks 1400 mm

Note: The automation is installed on the external wall of the building, so it must be protected from bad weather.


Additional components (to be purchased separately):
S-10DOORFOTOH1 Pair of safety photocells
S-10DOORSTF Pair of containers for additional safety photocells

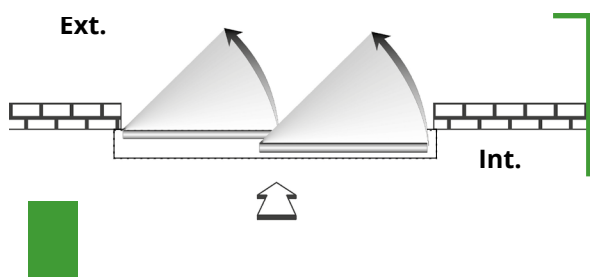

S-10DOORSF2MF

Configuration: single sliding with break-out sidelight panel. Frame break-out system composed of 1 x break-out kit, 1 x upper profile 1300 mm, 1 x floor track 1400 mm, 1 x ball-lock, 1 x magnetic contact. Specify right or left-hand (consult TAU for additional information)

Additional components (to be purchased separately):
S-10DOORSQ2 Lock brackets to prevent opening from the outside (2 pcs)
S-10DOORCRN2 1 pair of hinges
S-10DOORGPS Cable sheath for photocell
S-10DOORGPS Retractable cable sheath for photocell

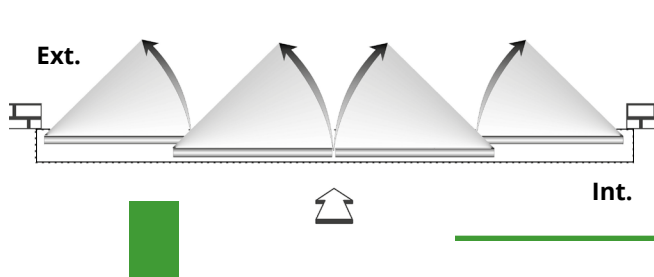

S-10DOORSF4MF

Configuration: bi-parting with break-out sidelight panels. Frame break-out system composed of 2 x break-out kits, 2 x upper profiles 1300 mm, 2 x floor tracks 1400 mm, 2 x ball-locks, 2 x magnetic contact

Additional components (to be purchased separately):
S-10DOORSQ4 Lock brackets to prevent opening from the outside (4 pcs)
S-10DOORCRN4 2 pairs of hinges
S-10DOORGPS2 Cable sheath for photocell (2 pcs)
S-10DOORGPS2 Retractable cable sheath for photocell (2 pcs)

ACCESSORIES

ACCESSORIES



S-10DOORRAD2

Infrared radar for activation (up to 3 m) and safety with coverage of the movement area of the automatic door compliant with EN16005



S-10DOORRAD4

Microwave/infrared radar for activation (up to 4 m) and safety with coverage of the movement area of the automatic door compliant with EN16005



S-10DOORRAD

Infrared radar for activation and safety. Wide/narrow field



S-10DOORADM

Microwave radar detector, scanned area 4 m

S-10DOORRAD/STA

Infrared radar for side safety. Narrow field compliant with EN12978

S-10DOORADMU

Microwave radar detector, unidirectional, scanned area 4 m



P-10T-LINEANT10

1 m support kit for framed leaf

P-10T-LINEANT15

1,5 m support kit for framed leaf

P-10T-LINEANT20

2 m support kit for framed leaf



S-10T-LINECRIS10

Aluminium clamp for frameless glass panels (thickness 10 mm), length 1 m (Complete with caps for 1st door)

S-10T-LINECRIS15

Aluminium clamp for frameless glass panels (thickness 10 mm), length 1,5 m (Complete with caps for 1st door)



S-10T-LINECRISK2A

Kit of screws for the aluminium clamp for frameless glass panels for the 2nd door

NEW



S-10DOORFOTOH1

Pair of safety photocells with control unit



S-10DOORFOTOH2

Additional pair of safety photocells



S-10T-LINESELF

Key function selector



S-10T-LINESELF

Function selector




S-10T-LINETD

Digital key pad



S-10DOORTL

Microwave, hygienic, touchless, automatic door activation switch, scanned area 4 m, 3 different faceplates included



S-10T-LINEBATT

Back-up battery kit



S-10T-LINE1250

Sliding plate for framed leaf. Compatible with S-10T-LINEPROFI



S-10T-LINE1240

Sliding plate for crystal leaf



S-T-LINEPROFI

T-line lower support (2 m bars)




S-T-LINESPA

Brush seal 4 m



S-10T-LINEART

T-line cover opening kit



S-10T-LINEBLOCL

Electromechanical lock with center release (It can be used on automatic doors with framed leaves with a maximum thickness of 50 mm)




S-10T-LINEBLOCF2


Electromechanical lock with side handle release

TECHNICAL DRAWINGS


Minimum space necessary to disassemble the carter

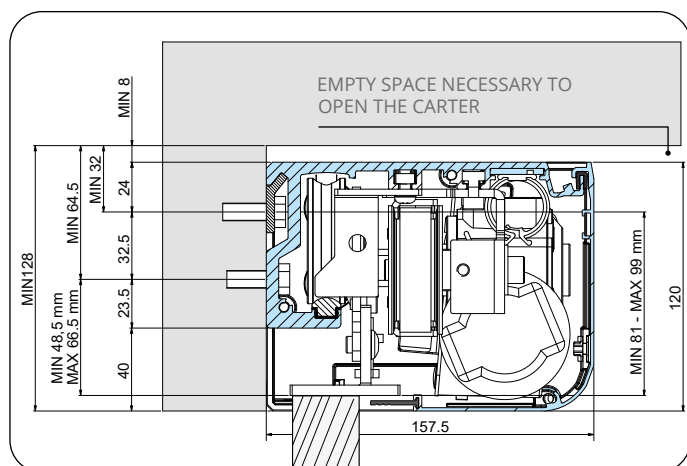


Minimum space necessary to open the carter with articulation kit

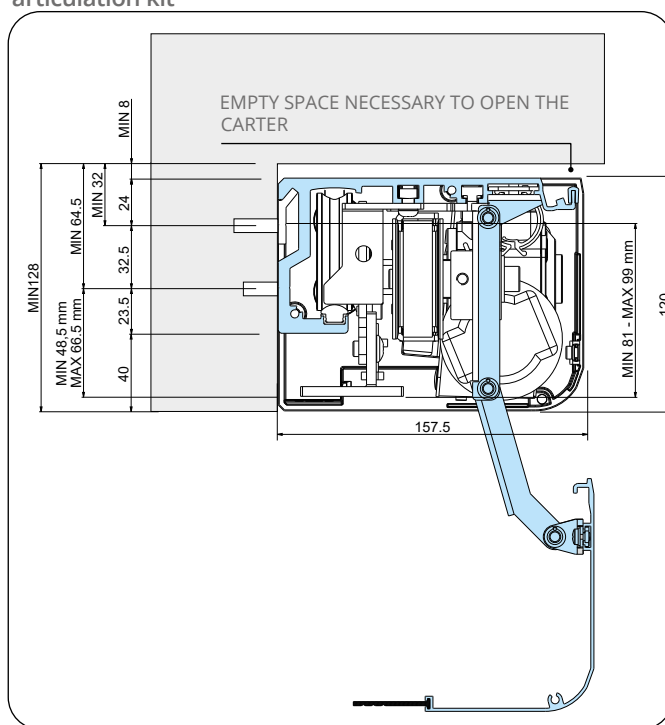

Minimum space necessary to open the carter upwards

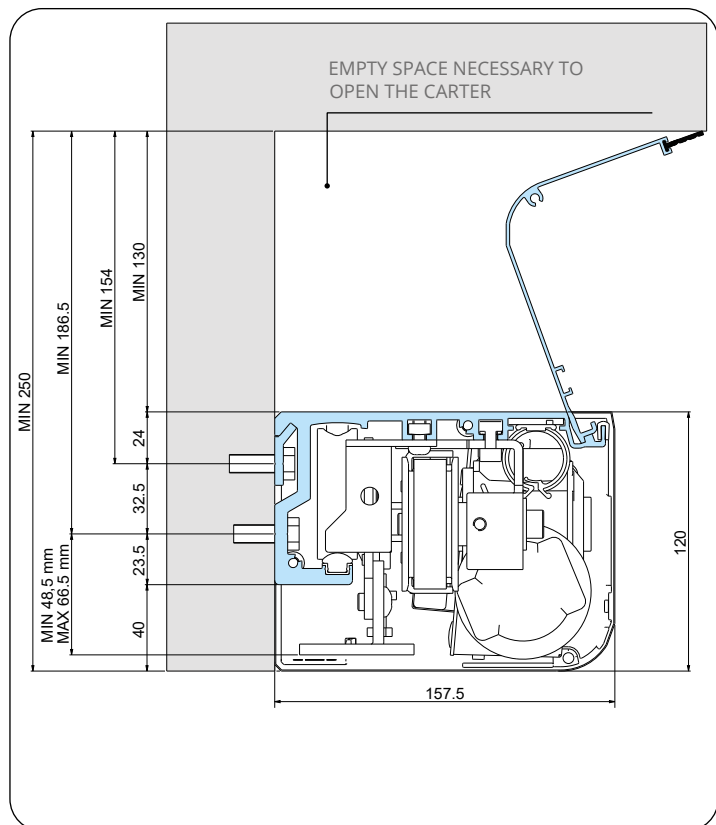

Max. range of carriage adjustment

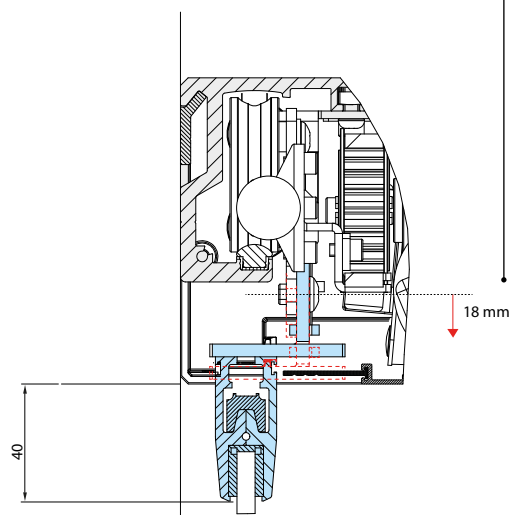

Use and maintenance manuals



TLINEKIT



T-LINE



DC20