

R40

R40-R / R40L-R



DC
MOTOR

Up to
3 m

Opening time
9 s



P-650R40-R

Fast DC underground operator with encoder with **2,3 m cable**. Mamixum gate leaf sizes: **3 m/300 kg**. Foundation box and release to be **ordered separately**.

P-650R40L-R

Fast DC underground operator with encoder with **9 m cable**. Mamixum gate leaf sizes: **3 m/300 kg**. Foundation box and release to be **ordered separately**.

P-750D749MA-R


Electronic control unit for 1-2 DC fast operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure.



Accessories for R40 series
Page 96 - 97



Further accessories:
Transmitters Page 222
Photocells Page 228
Flashing lights
Page 232



MADE IN
ITALY

HIGH SPEED

Ready for a new challenge.



+45% SPEED

Percentage calculated in comparison with the 230 V AC version



ALWAYS WORKING

Works also during power failures



PROTECT YOUR FAMILY

Closes the gate quickly to protect your family

R40-R e R40L-R opening time = 9 s





R30VELOCE and R30VELOCEL opening time = 16,5 s



SAVES TIME

TECHNICAL DRAWINGS

Technical features	R40/R40L-R
Power supply	230 V AC (50 - 60 Hz)
Motor power supply	24 V DC
Open circuit voltage	1,3 A
Power rating	300 W
Opening time 90°	9 s
Duty cycle	100 %
Operating temperature	-20° C ÷ +55° C
Motor thermal protection	-
Degree of protection IP	IP 67
Control unit to match	D749MA-R
Gearmotor weight	11,5 Kg

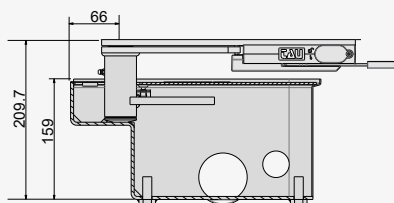

ACCESSORIES

COMMON ACCESSORIES



P-700BOXCT
Cataphoresis steel foundation box.
Release not included



P-700BOXI
Stainless steel foundation box.
Release not included



P-650ESV1 / P-650ESV2
Vertical electric lock recommended
for leaves longer than 3 m (1=LEFT
- 2=RIGHT)



P-650ES1 / P-650ES2
Horizontal electric lock
recommended for leaves longer
than 3 m (1=LEFT - 2=RIGHT)



P-700BAP1
Gate stopper for light leaves




P-900VLED
Low voltage 12-18-24 V DC
white led flashing light



P-700SBDR
Release with key and DIN lock



P-700SBTR
Tri-lobed key release



P-700KIT360
360° opening kit

NEW



P-700BAP
Gate stopper for heavy leaves



P-700BAP2
Gate stopper wall/floor mount



P-650CVS
Curved manual lock

230 V AC ACCESSORIES



P-750D770M
Electronic control unit for one or two
230 V gate operators with soft-stop and
built-in 433,92 MHz rolling code radio
receiver, complete with enclosure



P-700GS3
3-core waterproof connector (IP68) for
230 V motor cables

18/24 VOLT ACCESSORIES



P-750D749MA

Electronic control unit for one or two DC gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-750D749MA-R

Electronic control unit for 1-2 DC fast operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-700GS5

5-core waterproof connector (IP68) for 12 V motor cables



K-200BATT

12 Volt Battery, 7,2 Ah with cable



K-030KITKB20

Battery cables kit (20 pcs)




M-030000CC50


Multicore cable (2 x 2.5 sq.mm + 3 x 0.5 sq.mm)

⚠ Use only M-030000CC50 cable or equivalent

DOOR OPENING DRAWING

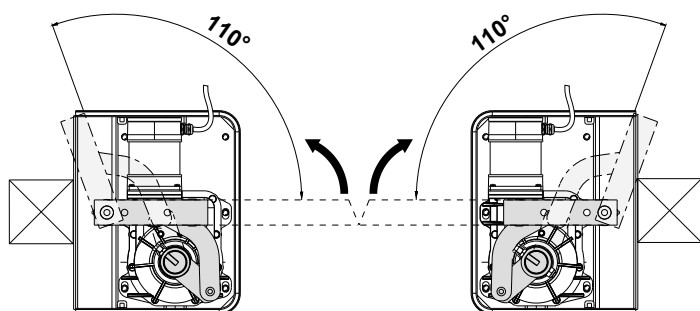

LIMIT TO USE*

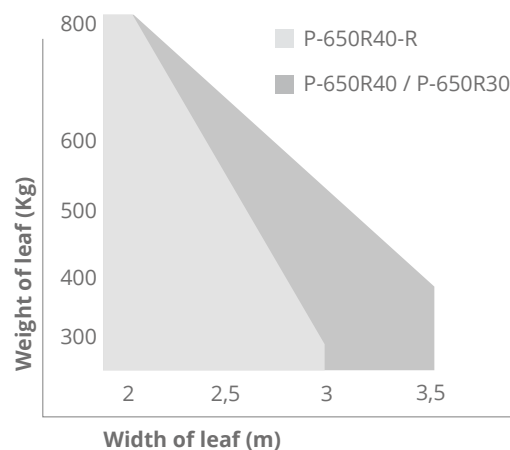

If the leaves are closed or less than 50% open, and the gate is installed in windy areas, the indicated lengths must be reduced by 50%.

Use and maintenance manuals



R30-R40



D749MA



D749MA-R



D770M