

LINEAR GATE OPERATOR **ARM225BI** **VECTI-T**

max. **3 m**

DC MOTOR
230 V MOTOR

Opening
time from
12 to 16 s



P-650ARM225BI

Irreversible DC electromechanical telescopic gate operator with encoder. Max. gate leaf 3 m.

P-650VECTI-T

Irreversible 230 V electromechanical telescopic gate operator, 1400 rpm. Max. gate leaf 3 m.



**Accessories for
ARM200/P-650VECTI
series**
Page 76 - 77



Further accessories:
Transmitters Page 222
Photocells Page 228
Flashing lights
Page 232

FEATURES:

- residential/apartment building/commercial use
- for gates leaves up to 3 m
- rod extension gate operator
- brackets to be welded, included
- adjustable mounting brackets (optional)
- electrical connections are easier thanks to the larger upper space
- manual release with key lock
- quick and easy installation

18 V PROS:

- low voltage DC gate operator
- auto-learning of the gate stroke through optical encoder
- obstacle detection and crush prevention
- in accordance with EN 12453 standards
- works even during power outage thanks to the optional backup battery
- fast operating speed
- soft start and soft stop
- intensive and continuous use without overheating up to 1500 cycles per day

230 V PROS:

- 230 V gate operator
- built-in capacitor
- high torque and power
- suitable for gates with mechanical operating issues



MECHANICS OF EXCELLENCE

All gears are made of metal and are assembled with high quality, double-shielded ball bearings to achieve absolute precision between their axes.



EASY INSTALLATION

Thanks to the connections from above, it is more convenient and faster to install and wire.



MULTI-POSITION BRACKETS

Multi-position adjustable brackets allow greater flexibility during assembly even on non standard sized posts (optional).




MANUAL RELEASE

The manual release device is simple and intuitive and is protected by a unique coded key that can also be used for the external key selector.

Technical features	ARM225BI	VECTI-T
Power supply	230 V AC (50 - 60 Hz)	230 V AC (50 - 60 Hz)
Motor power supply	18 V DC	230 V AC
Open circuit voltage	1 A	1,5 A
Power rating	120 W	350 W
Opening time 90°	12 s*	16 s*
Duty cycle	100 %	36 %
Operating temperature	-20° C ÷ +55° C	-20° C ÷ +55° C
Motor thermal protection	-	160° C
Degree of protection IP	IP 44	IP 44
Stroke length	290 mm	290 mm
Control unit to match	D749MA	D770M
Actuator weight	6,8 Kg	8,0 Kg

TECHNICAL DRAWINGS

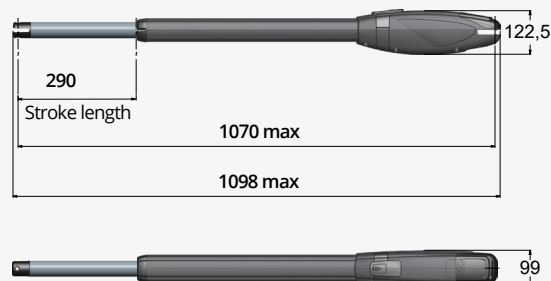

* Varies according to the installation geometries



ARM/VECTI KIT

WITH KEY SELECTOR

KIT composition:



LINEAR GATE OPERATORS



P-900VLED



CONTROL UNIT



P-900OPTIC



S-ARM0000208



P-300TKEY + P-300TSL

+



S-ARM0000282



P-250K-SLIMRP



C-CRT

MODELS IN: DC MOTOR

KIT	MODEL	MAX. GATE LEAF	CONTROL UNIT	ENCODER	REVERSIBLE / IRREVERSIBLE
K-KARM225BIL	P-650ARM225BI	3+3 m	P-750D749MA	●	Irreversible
K-KARM250BIL	P-650ARM250BI	4+4 m	P-750D749MA	●	Irreversible
K-KARM270BIL	P-650ARM270BI	5+5 m	P-750D749MA	●	Irreversible

MODELS IN: 230 V AC

KIT	MODEL	MAX. GATE LEAF	CONTROL UNIT	ENCODER	REVERSIBLE / IRREVERSIBLE
K-KVECTI-T	P-650VECTI-T	3+3 m	P-750D770M		Irreversible
K-KARM250L	P-650ARM250I	4+4 m	P-750D770M		Irreversible
K-KARM270L	P-650ARM270I	5+5 m	P-750D770M		Irreversible



ARM/VECTI KIT

WITH TWO TRANSMITTERS

KIT composition:



LINEAR GATE OPERATORS



P-900VLED



CONTROL UNIT



P-900OPTIC



P-250K-SLIMRP



P-250K-SLIMRP



S-ARM0000208

+



S-ARM0000282



C-CRT

MODELS IN: DC MOTOR

KIT	MODEL	MAX. GATE LEAF	CONTROL UNIT	ENCODER	REVERSIBLE / IRREVERSIBLE
K-KARM225BIL2	P-650ARM225BI	3+3 m	P-750D749MA	●	Irreversible
K-KARM250BIL2	P-650ARM250BI	4+4 m	P-750D749MA	●	Irreversible
K-KARM270BIL2	P-650ARM270BI	5+5 m	P-750D749MA	●	Irreversible

MODELS IN: 230 V AC

KIT	MODEL	MAX. GATE LEAF	CONTROL UNIT	ENCODER	REVERSIBLE / IRREVERSIBLE
K-KVECTI-T2	P-650VECTI-T	3+3 m	P-750D770M		Irreversible
K-KARM250L2	P-650ARM250I	4+4 m	P-750D770M		Irreversible
K-KARM270L2	P-650ARM270I	5+5 m	P-750D770M		Irreversible

ACCESSORIES

COMMON ACCESSORIES



P-650ARMKITSTF
Kit consisting of 2 multi-position fixing brackets



P-650ARMKITSTI
Tilting bracket for sloping gates (1 pcs)



P-650ARMKITSTFM
Kit multi-position adjustable oversized bracket for gate leaves over 4 m (1 pcs)



P-650ARM200KITFCAR
Kit adjustable mechanical stopper in opening (2 pcs)



P-650ES1 / P-650ES2
Horizontal electric lock recommended for leaves longer than 3 m (1=LEFT - 2=RIGHT)



P-650ESV1 / P-650ESV2
Vertical electric lock recommended for leaves longer than 3 m (1=LEFT - 2=RIGHT)



P-700BAP
Gate stopper for heavy leaves



P-700BAP1
Gate stopper for light leaves



P-700BAP2
Gate stopper wall/floor mount



P-900TOWERF
Painted aluminum column for photocells with 1 hole h49 cm



P-750CUP
Control unit enclosure protective lid



P-650CVS
Curved manual lock



P-250BLUEWAY
Multi-function interface connecting TAU control units to a smartphone or PC via Bluetooth, enabling the configuration and management of control units and radio memories through TauApp 2.0

NEW



P-250T-CONNECT
Ethernet + Wi-Fi device - to enable through Tau Open 2.0 application, the use of the smartphone remotely, to open/close and check the status of the gate



P-750COL
Control unit mounting post

18/24 VOLT ACCESSORIES



P-750D749MA
Electronic control unit for one or two DC gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-750D749MA-R
Electronic control unit for 1-2 DC fast operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



P-750D729MA
Electronic control unit for one or two DC reversible and irreversible gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, transformer and enclosure (for P-650ARM250BO/ P-650ARM270BO)



K-030KITKB20
Battery cables kit (20 pcs)



K-200BATT
12 Volt Battery, 7,2 Ah with cable



K-200KB4
Battery charger and backup battery kit (for D729MA)



M-030000CC50
Multicore cable (2 x 2.5 sq.mm + 3 x 0.5 sq.mm)



Use only M-030000CC50 cable or equivalent


230 V AC ACCESSORIES





P-750D770M
Electronic control unit for one or two 230 V gate operators with soft-stop and built-in 433,92 MHz rolling code radio receiver, complete with enclosure

LIMIT TO USE*

If the leaves are closed or less than 50% open, and the gate is installed in windy areas, the indicated lengths must be reduced by 50%.

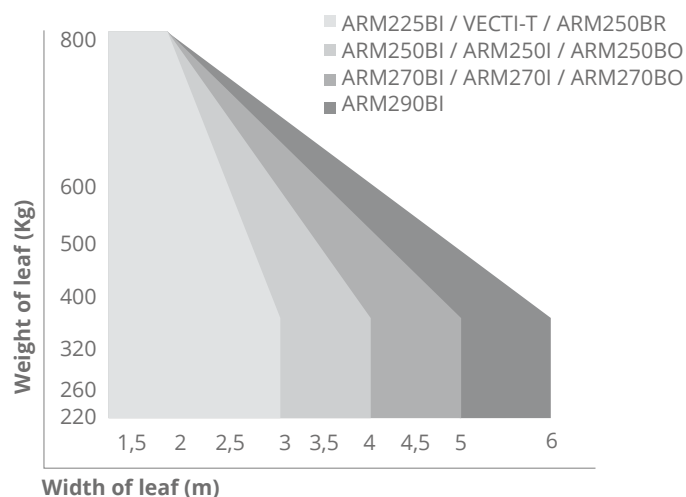

INSTALLATION SIZES (MM)*

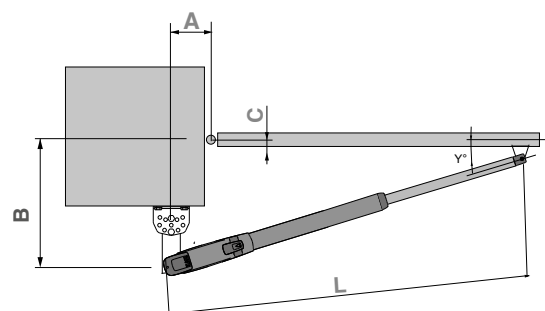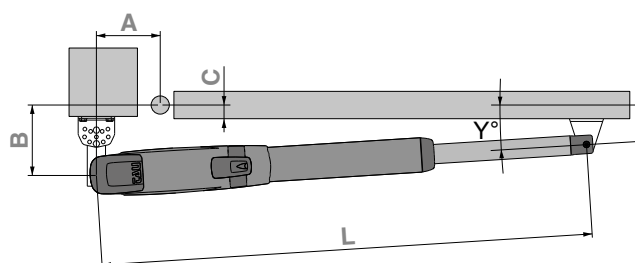

Model	Leaf opening	A	B	C	L
VECTI-T ARM225BI	90°	Min. 110	from 120 to 165	20	1070
		Max. 140	from 120 to 140	20	1070
	100°	130	from 120 to 130	20	1070
Recommended	90°	140	140	20	1070
ARM250I ARM250BI ARM250BO	90°	Min. 120	from 135 to 275	20	1350
		Max. 200	from 135 to 215	20	1350
	100°	Min. 145	from 135 to 160	20	1350
		Max. 200	from 135 to 180	20	1350
	110°	Min. 170	from 135 to 140	20	1350
		Max. 200	from 135 to 155	20	1350
Recommended	90°	190	190	20	1350
ARM270I ARM270BI ARM270BO	90°	Min. 150	from 170 to 345	20	1560
		Max. 225	from 170 to 290	20	1560
	100°	Min. 175	170	20	1560
		Max. 225	from 170 to 250	20	1560
	110°	Min. 210	from 170 to 175	20	1560
	120°	Max. 225	from 170 to 225	20	1560
	120°	Max. 230	from 170 to 175	20	1560
Recommended	90°	225	225	20	1560

Model	Leaf opening	A	B	C	L
ARM290BI	90°	Min. 200	from 225 to 595	20	2266
		Max. 450	from 225 to 420	20	2266
	100°	Min. 250	from 225 to 480	20	2266
		Max. 450	from 225 to 340	20	2266
	125°	Min. 370	from 225 to 240	20	2266
		Max. 400	from 225 to 265	20	2266

* Follow the instructions for the installation

NB: In order to get the best performances, the operators have to be installed with A and B values as high as possible. To work correctly, the angle formed by the actuator and the gate. (See the picture above for Y° value) must be > 3° (ARM225/P-650VECTI - ARM250) and > 4° (ARM270 - ARM290) both with the gate completely closed and completely open.

Use and maintenance manuals



ARM200



D749MA-R



D749MA



D770M